
















**Thank you for purchasing the Performance Bridge.
Please follow these instructions for easy assembly.**

1  Cam Lock 3 Pes	2  Klix Cam 3 Pes	3  Housing Cap 3 Pes	4  Adjustable Glide 2 Pes	5  6 Hole L-Bracket 2 Pes	6  Screw #6 x 5/8" 60 Pes	7  3" L-Bracket With 6 Hole 2 Pes
8  Flat Bracket (6 hole) 6 Pes	9  M4 x 65 Allen-Key 1 Pc	A  Top Panel		B  Back Panel		

KLIX CAM INSTRUCTIONS


1  Line up Cam Lock, turn clockwise.	2  Insert the cam with the arrow pointing towards the hole in the edge.	3  Insert the Cam Lock into Klix Cam. Turn Klix Cam to lock.
---	---	--

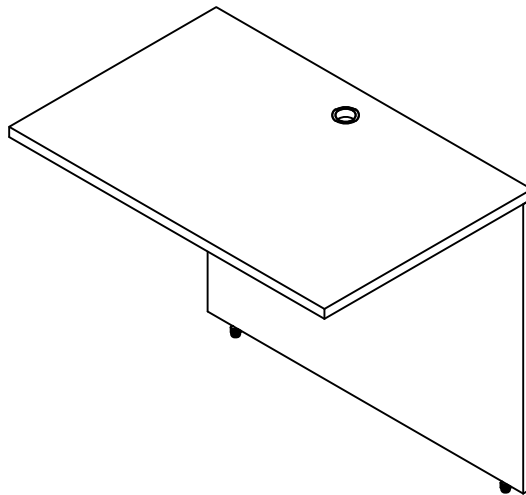

IMPORTANT !


- Place all wooden parts on a clean and smooth surface such as a rug or carpet to avoid the parts from being scratched.
- Check that you have all parts and hardware.
- Remove all wrapping materials, including staples & packing straps before you start to assemble.
- Do not tighten any screws or bolts until the unit is completely assembled.
- Keep all hardware parts out of reach of children.

1

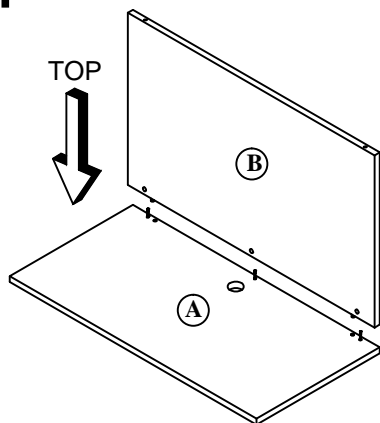


Attach Back Panel(B) to Top Panel(A) by using Cam Lock(1) and Klix Cam(2) as shown in Detail- X.


2



Attach L-Bracket(5) to Top Panel(A) and Back Panel(B) as shown by tighten Screws(6) securely.

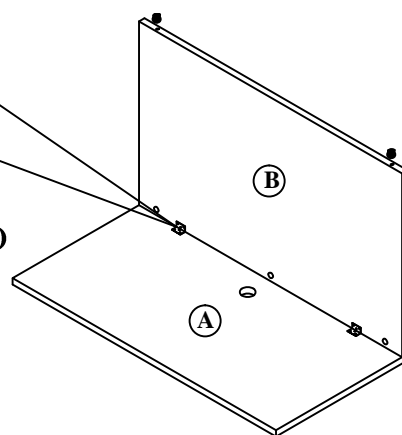


3

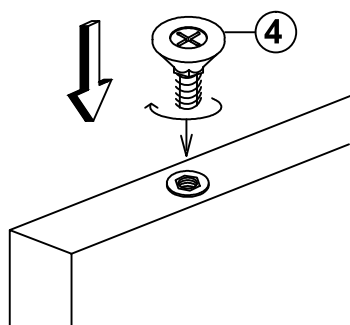

Screw Adjustable Glide(4) into bottom of Side Panel.

4

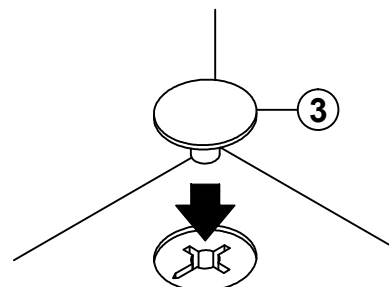

Attach Housing Cap(3) to all Klix Cams(2) by pushing neck through center of cam.

Additional hardware enclosed to allow you to attach this bridge to other pieces.